




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G09G 3/28		A1	(11) International Publication Number: WO 98/21706
			(43) International Publication Date: 22 May 1998 (22.05.98)
(21) International Application Number: PCT/KR97/00112 (22) International Filing Date: 13 June 1997 (13.06.97) (30) Priority Data: 1996/52996 8 November 1996 (08.11.96) KR (71) Applicant (for all designated States except US): SAMSUNG DISPLAY DEVICES CO., LTD. [KR/KR]; 575, Shin-dong, Paldal-gu, Suwon-city, Kyungki-do 442-390 (KR). (72) Inventors; and (75) Inventors/Applicants (for US only): MIKOSHIBA, Shigeo [JP/JP]; 2-43-17, Izumi, Suginamiku, Tokyo 168 (JP). RYEOM, Jeong, Duk [KR/KR]; 1-1401 Munraegongwon Hanshin Apt., 77-2, Munrae-dong 3-ga, Youngdeungpo-gu, Seoul 150-093 (KR). (74) Agent: LEE, Young, Pil; The Cheonghwa Building, 1571-18, Seocho-dong, Seocho-gu, Seoul 137-073 (KR).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published With international search report.	

(54) Title: DISCHARGE DEVICE DRIVING METHOD

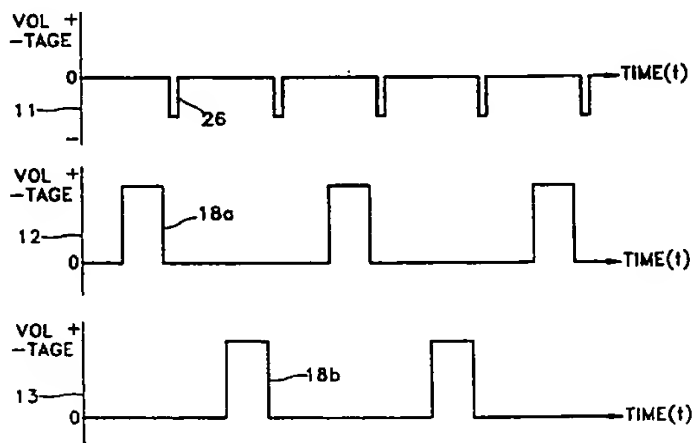

(57) Abstract

There is provided a method for driving a discharge device, especially a plasma display panel to improve a discharge process. The discharge device driving method prevents the increase of a discharge voltage and the decrease of an operating margin since space charge is efficiently controlled to lower the discharge voltage by adding a non-discharge signal for controlling space charge to a driving signal applied to at least one of two discharge electrodes, or to a third electrode, during a discharge sustaining period of the driving signals applied to both the discharge electrodes. In particular, the effects of the present invention is markedly excellent in the case of a pulse width of $1\mu\text{s}$ or below. Discharge can be stably sustained by using a space-charge controlling non-discharge pulse of $200\text{ns}\sim 1\mu\text{s}$ wide, according to the panel structure, physical characteristics, and the driving method. In addition, in a method for applying the space-charge controlling non-discharge pulse according to the present invention, discharge efficiency can be increased by enabling the space-charge controlling non-discharge pulse to efficiently use space charge in a discharge space during a discharge sustaining period.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

DISCHARGE DEVICE DRIVING METHOD

Technical Field

The present invention relates to a discharge device driving method, and
5 more particularly, to a method for improving the discharge process in a discharge device such as a plasma display panel.

Background Art

A discharge device, which is driven by a pulse voltage, has at least one pair
10 of electrodes and performs a discharge by applying the pulse voltage to at least one electrode. Examples of such discharge devices are a fluorescent lamp, a gas laser generator, a sulfur dioxide-removing O₃ generator, and a plasma display panel. Here we will focus on the discharge device of the plasma display panel.

There are generally two types of display - AC and DC. The DC plasma
15 display panel uses electrodes exposed to a discharge space so that charges move directly between electrodes facing each other. On the other hand, in the AC plasma display panel, at least one of electrodes that face each other is surrounded by a dielectric, thereby preventing direct movement of charges between the electrodes. That is, as shown in FIG. 1A, the DC plasma display panel has a
20 scanning electrode 2 formed on a frontal glass substrate 1 and an address electrode 5 formed on a rear glass substrate 6, which are directly exposed to a discharge space 4 so that a charge can move directly between the electrodes. The AC plasma display panel, as shown in FIG. 1B, has a scanning electrode 2 and a common electrode 3 which are covered by a dielectric layer 7, thus preventing direct charge
25 movement between pairs of facing electrodes, that is, between the scanning electrode 2 and the address electrode 5 or between the scanning electrode 2 and the common electrode 3.

There are two methods for driving the plasma display panels as constituted above, that is, DC and AC driving methods whose classification depends on
30 whether the polarity of a voltage applied for discharge sustainment varies with time or not. Both DC and AC driving methods can be applied to the DC plasma display panel, while only the AC driving method is available for the AC plasma display

panel.

FIG. 1A illustrates a DC plasma display panel adopting a facing discharge structure, and FIG. 1B illustrates an AC plasma display panel adopting a surface discharge structure. As shown, the discharge space 4 is formed between the facing surfaces of the frontal glass substrate 1 and the rear glass substrate 6. In the DC plasma display panel, the flow of electrons supplied from the address electrode 5 (i.e., cathode) is the main energy source for sustaining discharge since the scanning electrode 2 (i.e., anode) and the address electrode 5 are directly exposed to the discharge space 4. In the AC plasma display panel, the scanning electrode 2 and the common electrode 3 are situated within the dielectric layer 7, thus being electrically isolated from the discharge space. In this case, discharge is sustained by the well-known wall charge effects. An example of the AC plasma display panel adopting the surface discharge structure is disclosed in the U.S. Patent No. 4,833,463 by AT&T.

Depending on the constitution of electrodes for discharge, the plasma display panels are grouped into a facing discharge structure or a surface discharge structure. These structures, in turn, are divided into a two-electrode structure, a three-electrode structure, and so on to facilitate discharge. FIG. 2A illustrates a facing discharge structure, and FIG. 2B illustrates a surface discharge structure. In the facing discharge structure, address discharge for selecting a pixel and a sustainment discharge for sustaining discharge in a discharge space formed by blockheads 8 occur between the scanning electrode 2 and the address electrode 5. In the surface discharge structure, address discharge for selecting a pixel occurs between the address electrode 5 and the scanning electrode 2 which are orthogonal and face each other in the discharge space formed by the blockheads 8, and the sustainment discharge for sustaining discharge occurs between the scanning electrode 2 and the common electrode 3. The blockheads 8 act to form the discharge space and prevent crosstalk to adjacent pixels by blocking light generated during discharge.

For reliable operation of the plasma display panel as a color picture display, gray-scaling should be performed. Currently, a single field is divided into a plurality of sub-fields for time-share driving. FIG. 3 is a diagram for explaining

a gray-scaling method for an AC plasma display panel applied to products, which is well-known to those skilled in the art. In the gray scale displaying method for the AC plasma display panel, a single field is divided into four sub-fields for time-share driving. Here, each sub-field has an address period 9 and a discharge sustaining period 10, and $2^4 (= 16)$ gray scales can be displayed with these four sub-fields. That is, since the ratio of the discharge sustaining periods in a first through a fourth field is 1:2:4:8, sixteen gray scales can be attained by constituting the discharge sustaining periods as 0, 1(1T), 2(2T), 3(1T+2T), 4(4T), 5(1T+4T), 6(2T+4T), 7(1T+2T+4T), 8(8T), 9(1T+8T), 10(2T+8T), 11(3T+8T), 12(4T+8T), 13(1T+4T+8T), 14(2T+4T+8T), or 15(1T+2T+4T+8T). For example, to display a gray scale of 6 at an arbitrary pixel, only the second sub-field (2T) and the third sub-field (4T) are addressed, and to display a gray scale of 5, the first and fourth sub-fields should be addressed.

FIG. 4 shows the waveforms of signals applied to a generally used AC plasma display panel driving method, showing the timings of signals applied to an address electrode 11, a scanning electrode 12, and a common electrode 13, respectively. In an erase period 14, to accurately display a gray scale, the operation of the next sub-field is activated by generating a weak discharge and thus a wall charge caused by the previous discharge is erased. During an address period 15, discharge occurs only in a selected area, i.e., a pixel of the whole screen in the plasma display panel by selective discharge by means of a write pulse 17 between the address electrode 5 and the scanning electrode 2 which are orthogonal to each other. That is, image information converted into an electrical signal triggers each discharge of the addressed pixels. In a discharge sustaining period 16, the image information is realized by sustaining the triggered discharge on a pixel, which is addressed on a real screen, by means of successive discharge sustaining pulses 18.

In the plasma display panel driven by the above signals, it is well-known and empirically proven that luminescent efficiency increases using shorter pulses as the discharge sustaining voltage during a discharge sustaining period when driving the plasma display panel. This is because if a narrow pulse is used as the voltage applied during the discharge sustaining period, thermal and electrical loss is reduced and thus luminescent efficiency is increased.

FIG. 5 is a diagram explaining the discharge principle of an AC plasma display panel. Here, when the discharge sustaining pulse 18 having the discharge starting voltage 20 is applied, the wall charge 24 increases and thus the discharge voltage 25 drops. In the case of a normal discharge, discharge continues until a discharge extinguishing voltage 21 is reached, thus functioning to generate sufficient wall charge and controlling the distributions of wall and space charge densities to be favorable for the next discharge. However, as the discharge sustaining pulse 18 becomes narrower, a wall charge forming period 22 becomes very short. Thus, it is difficult to generate sufficient wall charge, and worse, a space charge controlling period 23 is absent, resulting in a complete loss of control of the wall and space charges after discharge is extinguished. In this case, to continue the discharge, the discharge starting voltage 20 should be very high, which makes adjacent electrodes susceptible to discharge. Therefore, the operating margin gets smaller and it is very difficult to discharge only the addressed pixel. That is, the margin for a pulse voltage for sustaining a stable discharge becomes smaller, and is lost in the worst case. According to the U.S. Patent No. 4,833,463 of AT&T, a negative pulse ($-V_{TC}$) is applied after an address electrode driving signal (address pulse, $+V_w/2$) during an addressing period in order to reduce the discharge starting voltage. This is for forming the wall charge near a scanning electrode as much as possible by applying the negative pulse ($-V_{TC}$) after the address pulse ($+V_w/2$) and pushing out the wall charge formed near an address electrode by the apply of the address pulse toward the scanning electrode (discharge sustaining electrode or common electrode), thereby making easy the starting of the sustaining discharge. When the negative pulse is applied to the address electrode during the addressing period as described above, the wall charge which is sufficient for the sustaining discharge can be formed near the scanning electrode even if the voltage of the address pulse applied to the address electrode is low, thereby providing an effect of lowering the voltage of the address pulse. However, since the negative voltage is applied once only during the address period, there is no method for collecting the space charges formed in a discharge space during the sustaining period. That is, the voltage of the discharge sustaining pulse applied to the scanning electrodes cannot be lowered.

There are many improvements to be made in the discharge structure and driving method of the plasma display panel. In particular, the driving voltage is higher than those of other displays due to low luminescent efficiency and discharge-dependence. Accordingly, when the driving voltage drops during driving, reliable performance of the plasma display panel cannot be expected. Furthermore, another problem arises in that the visibility of moving pictures is lowered when time share gray-scaling is displayed.

Disclosure of the Invention

10 To overcome the above problems, the object of the present invention is to provide a discharge device driving method in which the operating margin is increased to reduce the driving voltage as a driving characteristic and, particularly, the prevention of a decrease of the operating margin caused by driving a plasma display panel by a narrow pulse.

15 To achieve the above object, there is provided a method for driving a discharge device which has at least a pair of electrodes and generates a discharge by applying a discharge address pulse and a discharge sustaining pulse to at least one of the pair of electrodes, the driving method comprises the step of applying a space charge controlling pulse to at least one of the electrodes during a sustaining
20 period.

Preferably, the space charge controlling pulse is applied during a pause period of the discharge sustaining pulse, the voltage level of the space charge controlling pulse is in a range in which a self-sustained discharge caused by the voltage itself is avoided, and the pulse width of the space charge controlling pulse
25 is between 200nsec-1 μ sec.

In the present invention, preferably, the discharge device comprises: a pair of electrodes in parallel for generating a sustainment discharge by alternately applying discharge sustaining pulses of the same polarity; and a third electrode orthogonal to the pair of electrodes, for generating an address discharge in
30 cooperation with at least one of the pair of electrodes upon application of a discharge address pulse. Preferably, the space charge controlling pulse is applied to the third electrode during the pause period of the discharge sustaining pulse, or

to at least one of the pair of parallel electrodes during the pause period of the discharge sustaining pulse, or to the pair of parallel electrodes and the third electrode. It is preferable that the space charge controlling pulse has a polarity which is the same as or opposite to that of the discharge sustaining pulse.

5 Also, preferably, the method for driving the discharge device in which the pair of parallel electrodes are covered with an insulation layer and the polarity of the discharge sustaining pulse varies with time, comprises the steps of: addressing a discharge by applying the discharge address pulse to the third electrode and thus selecting an intended pixel; and sustaining the discharge by applying the discharge
10 sustaining pulse to at least one of the pair of parallel electrodes and thus maintaining luminescence of the selected pixel, wherein the discharge addressing step is temporally independent of the discharge sustaining step, and the discharge sustaining period includes repeated discharge sustaining pulses and discharge pause periods.

15 Also, preferably, the discharge device has a pair of parallel electrodes for generating a sustainment discharge by alternately applying discharge sustaining pulses of the same polarity. Preferably, the space charge controlling pulse having the same polarity as or the opposite polarity to that of the discharge sustaining pulse voltage is applied to the other electrode immediately after the discharge sustaining
20 pulse applied to one of the pair of electrodes is terminated. Also, in the present invention, preferably, the discharge device has a pair of electrodes, to one of which a positive discharge sustaining pulse is applied and to the other of which a negative discharge sustaining pulse is applied. Preferably, the method for driving the drive device comprises the steps of: addressing a discharge by applying the
25 discharge address pulse to at least one electrode of the paired electrodes and thus selecting an intended pixel; and sustaining the discharge by applying the discharge sustaining pulse to at least one of the pair of crossing electrodes and thus displaying the selected pixel luminescently, wherein the discharge addressing step is temporally independent of the discharge sustaining step, and the discharge
30 sustaining period includes repeated discharge sustaining pulses and discharge pause periods.

Also, in the method for driving the discharge device of the present

invention, preferably, a discharge sustaining pulse is applied only to one electrode of the pair of electrodes. Here, the discharge sustaining pulse has positive and negative polarities, alternately, and the space charge controlling pulse having a polarity opposite to that of the discharge sustaining pulse is applied to the other electrode immediately after the discharge sustaining pulse is applied. Also, as an alternative, one of the pair of electrodes is at 0V, the discharge sustaining pulse having positive and negative polarities is applied to the other electrode, and the space charge controlling pulse having the same polarity as that of the discharge sustaining pulse is applied after the discharge sustaining pulse.

10

Brief Description of the Drawings

FIG. 1A is a sectional view of a general DC plasma display panel as a discharge device;

FIG. 1B is a sectional view of a general AC plasma display panel as a discharge device;

15

FIG. 2A is an extracted perspective view of a plasma display device of a two-electrode facing discharge structure;

FIG. 2B is an extracted perspective view of a plasma display panel of a three-electrode surface discharge structure;

FIG. 3 is an explanatory diagram of a gray scale displaying method for the general AC plasma display panel;

20

FIG. 4 illustrates the waveforms of general signals applied to electrodes to drive the AC plasma display panel;

FIG. 5 is an explanatory diagram of the discharge principle of the AC plasma display panel;

25

FIG. 6 illustrates the waveforms of signals applied to electrodes to drive a plasma display panel as a discharge device according to a first embodiment of a driving method of the present invention;

FIG. 7 illustrates the waveforms of the signals shown in FIG. 6 applied to an AC plasma display panel according to a first embodiment of the present invention;

30

FIG. 8A illustrates a distribution of space charge when the signals of FIG.

4 are applied to the AC plasma display panel;

FIG. 8B illustrates a distribution of space charge when the signals of FIG. 7 are applied to the AC plasma display panel;

FIG. 9 illustrates the waveforms of signals applied to a test of the plasma display panel driving method of the present invention;

FIG. 10 is a linear diagram showing variations of a discharge sustaining voltage with the width of a discharge sustaining pulse in a test to which the signals of FIG. 9 are applied;

FIG. 11 is a linear diagram showing variations of a discharge stability with the width of a space-charge controlling non-discharge pulse in the test to which the signals of FIG. 9 are applied;

FIG. 12 illustrates the waveforms of driving signals according to a second embodiment;

FIG. 13 illustrates the waveforms of driving signals according to a third embodiment;

FIG. 14 illustrates the waveforms of perfect driving signals of the AC plasma display panel to which the third embodiment of FIG. 13;

FIG. 15 illustrates the waveforms of driving signals according to a fourth embodiment;

FIG. 16 illustrates the waveforms of driving signals according to a fifth embodiment;

FIG. 17 illustrates the waveforms of perfect driving signals of the AC plasma display panel to which the fifth embodiment of FIG. 16 is applied;

FIG. 18 illustrates the waveforms of driving signals according to a sixth embodiment;

FIG. 19 illustrates the waveforms of driving signals according to a seventh embodiment;

FIG. 20 illustrates the perfect waveforms of real driving signals when the method of the sixth embodiment is applied to the AC plasma display panel;

FIG. 21 illustrates the waveforms of driving signals according to an eighth embodiment;

FIG. 22 illustrates the waveforms of driving signals according to a ninth

embodiment;

FIG. 23 illustrates the waveforms of perfect driving signals when the discharge period signals of the eight embodiment are applied to a real AC plasma display panel;

5 FIG. 24 illustrates the waveforms of driving signals according to a tenth embodiment;

FIG. 25 illustrates the waveforms of driving signals according to an eleventh embodiment;

10 FIG. 26 illustrates the waveforms of driving signals according to a twelfth embodiment;

FIG. 27 illustrates the waveforms of driving signals according to a thirteenth embodiment;

FIG. 28 illustrates the waveforms of driving signals according to a fourteenth embodiment; and

15 FIG. 29 illustrates the waveforms of driving signals according to a fifteenth embodiment.

Best mode for carrying out the Invention

20 The discharge device driving method of the present invention pertains mainly to a discharge device driven by a pulse voltage and, particularly, to the application of a space-charge controlling non-discharge pulse during a discharge pause period assigned between two consecutive discharges in a discharge sustaining period of a plasma display panel.

25 FIG. 6 illustrates the waveforms of driving signals showing a method for generating a sustainment discharge in a discharge device according to the present invention. As shown, the main characteristic of the sustainment discharge driving lies in the addition of a space-charge controlling non-discharge pulse 26 to conform to the discharge pause period assigned between the discharge sustaining pulses 18a and 18b of both the scanning electrode signal 12 and the common electrode signal
30 respectively applied to the main electrodes 2 and 3 for generating the sustainment discharge.

FIG. 7 illustrates the waveforms of electrode driving signals applied to an

AC plasma display panel according to a first embodiment of the present invention. The electrode driving signals of FIG. 7 are perfect in that the signal waveforms during an erase period 14 and an address period 15 are combined with the electrode driving signals waveforms during the sustainment discharge period of FIG. 6. As described above, the drive timing of the AC plasma display panel is generally comprised of the erase period 14 for erasing remaining charge, the address period 15 for selecting an arbitrary pixel, and a discharge sustaining period 16 for maintaining luminescence. In particular, the discharge device is driven by adding the space-charge controlling non-discharge pulse 26 to the address electrode signal 11 during the discharge sustaining period for display-luminescence such that a discharge starting voltage is lowered in control of space charge in a discharge space. Accordingly, discharge can be sustained at a lower voltage. For this purpose, a negative pulse is applied as the space-charge controlling non-discharge pulse 26 to the address electrode signal 11 immediately after both discharge sustaining pulses 18a and 18b of the scanning electrode signal 12 and the common electrode signal 13, and its cycle coincide with those of both the discharge sustaining pulses 18a and 18b. Thus, the space charge caused by discharge generated by the scanning electrode signal 12 and the common electrode signal 13 can be controlled.

FIGS. 8A and 8B illustrate distributions of space charge in the AC plasma display panel. FIG. 8A shows the space charge distribution shortly after discharge between the scanning electrode 2 and the common electrode 3. In this case, the wall charge 19 is produced on an electrode which was positive during discharge and the remaining charged particles exist randomly as space charge 32 in the discharge space. The disorder level of the space charge 32 increases with time, and the space charge 32 is extinguished by diffusion and recombination. FIG. 8B shows the space charge distribution when the space-charge controlling non-discharge pulse 26 lower than a discharge starting voltage is applied to the address electrode shortly after discharge occurs between the scanning electrode 2 and the common electrode 3. In this case, the space charge 32 still remaining in the discharge space obtains kinetic energy by an electric field produced by the non-discharge pulse 26. Part of the space charge 32 collides with the scanning electrode or common electrode,

thus increasing the wall charge, and part of the space charge gathers around the scanning and common electrodes, thus increasing space charge density and thus electric conductivity around both electrodes. As a result, the discharge starting voltage drops and discharge is sustained at a relatively low voltage. Here, since
5 the voltage level of the space-charge controlling non-discharge pulse 26 is low, a new self-sustained discharge caused by application of this pulse voltage never occurs.

To find out what impact the non-discharge pulse 26 imposes as described above, the driving signals of the first embodiment were applied to an AC three-
10 electrode surface discharging plasma display panel currently on the market.

FIG. 9 is a timing diagram of the driving signals of the first embodiment used in an actual test. A discharge is generated at a pixel, for which a discharge will be triggered, by applying a $3.5\mu\text{s}$ pulse to the address electrode 5 during the address period 15, and wall charge is accumulated for triggering the discharge.
15 During this period, the scanning electrode is at 0V, and a voltage of 100-190V is applied to the common electrode 3 so that wall charge accumulation effects are improved to stabilize the next discharge. During the discharge sustaining period 16, a predetermined positive voltage is applied alternately to the scanning electrode 2 and the common electrode 3, and the negative space-charge controlling non-
20 discharge pulse 26 is applied to the address electrode 5 between the discharge sustaining pulses 18a and 18b applied respectively to the scanning electrode 2 and the common electrode 3, that is, during the discharge pause. In practice, the space-charge controlling non-discharge pulse 26 was applied about 40ns after application of the discharge sustaining pulses 18a and 18b. The voltage of the negative space-
25 charge controlling non-discharge pulse 26 is controlled to stabilize the discharge between 50-150V. Voltages at which the discharge is stabilized with and without the space-charge controlling non-discharge pulse were measured by varying the width of the discharge sustaining pulses 18a and 18b in the range between 90ns and $4\mu\text{s}$. Here, stabilizing the discharge indicates that all the pixels in a display pixel
30 group having several tens of pixels are stably illuminated without flickering. In addition, discharge stabilities were measured by varying the width of the space-charge controlling non-discharge pulse 26 in the range between 100ns and $1.5\mu\text{s}$,

the results were estimated, and the effects of the present invention were verified.

FIG. 10 illustrates the relationship between the width [μ s] and voltage [V] of the discharge sustaining pulse according to the application of a space charge controlling pulse as a result of the test in which the non-discharge pulse of the first embodiment is applied.

[Table 1]

variation of discharge sustaining voltage
with width of discharge sustaining pulse

width of discharge sustaining pulse [μ s]	overall discharge voltage [V] (without application of SCCP)	address discharge voltage [V] (without application of SCCP)	overall discharge voltage (with application of SCCP)	address discharge voltage [V] (with application of SCCP)
4	230	210	230	170
3	237	223	237	175
2	254	226	243	207
1.5	254	235	251	213
1	269	257	254	215
0.85	not measured	not measured	258	218
0.5	312	312	292	238
0.35	not measured	not measured	340	247
0.2	340 or above	impossible	340 or above	280
0.1	340 or above	impossible	340 or above	317
0.09	340 or above	impossible	340 or above	323

Here, ○ represents the overall luminescent voltage which makes addressing impossible without applying the space-charge controlling non-discharge pulse, and ● represents the overall luminescent voltage which makes addressing impossible applying the space-charge controlling non-discharge pulse. Δ represents a discharge sustaining voltage which makes addressing possible without applying the space-charge controlling non-discharge pulse, and ▲ denotes a discharge sustaining voltage which makes addressing possible applying the space-charge controlling non-discharge pulse. From the test results, it is noted that the discharge

sustaining voltage is lower with the application of the space-charge controlling non-discharge pulse 26 than without application of the space-charge controlling non-discharge pulse 26. In particular, with a pulse width of $1\mu\text{s}$ as a boundary 27, an overall discharge and an address discharge exist together when the space-charge
5 controlling non-discharge pulse 26 in the case of a pulse width less than $1\mu\text{s}$, thus losing an addressing function as indicated by reference numeral 28. In case of a discharge sustaining pulse width less than $0.5\mu\text{s}$, addressing is impossible and thus overall luminescence is immediately performed as indicated by reference numeral 29. However, when the space charge controlling pulse is applied, a stable address
10 discharge sustaining function was performed within measured limits. If the pulse width of the discharge voltage is large enough, the wall charge is sufficiently accumulated while the discharge sustaining pulse is applied, thereby automatically bringing the discharge to a halt. In this case, the space-charge controlling non-discharge pulse functions to control density distribution of space charge to influence
15 diffusion and extinguishing of the space charge, increase the existence of the space charge until the next discharge, and thus increase electric conductivity to facilitate the next discharge.

If the pulse width of the discharge voltage is too small, the voltages of the discharge sustaining pulses 18a and 18b become zero before the discharge
20 automatically stops after the start of the discharge. Thus, the discharge is forcibly stopped. In this case, a large amount of space charge remains. Under these circumstances, when the non-discharge pulse for controlling space discharge is applied, wall charge formation and control of charge density are markedly effected by the space-charge controlling non-discharge pulse.

25 Since there is a small difference between the presence and absence of the space charge controlling pulse, it can be inferred that the non-discharge pulse has a local, not global, influence on the discharge characteristics of the plasma display panel.

FIG. 11 illustrates the relationship between the width [μs] of the space-charge controlling non-discharge pulse and the stability of discharge. Here,
30 discharge stability is defined as a rate of the number of flickering unstable pixels in a single pixel group having several tens of pixels. That is, the highest level of

stability is achieved when 100% of the pixels are luminescent stably. From a test result, discharge is most stable with the width of the non-discharge pulse between 300-700ns. With the pulse width of 300ns or less, the discharge is likely to be extinguished, and with the pulse width of 700ns or more, overdischarge may cause
5 unstable discharge.

As described above, a discharge sustaining voltage is lowered during a discharge, especially with a pulse width of $1\mu\text{s}$ or less, by efficiently controlling space charge in a discharge space to be supplied to a discharge electrode. In addition, discharge is stably sustained at a width 30 of about 200ns- $1\mu\text{s}$ depending
10 on the panel structure, physical characteristics, and the driving method.

Meanwhile, as shown in FIG. 12, the space-charge controlling non-discharge pulse can be applied even though the discharge sustaining pulses of a scanning electrode signal 12 and a common electrode signal 13 are negative (-) in a second embodiment of the present invention. In this case, the above space charge
15 control effects can be achieved even with the application of the negative space-charge controlling non-discharge pulse 26 as the address electrode signal 11. As shown in FIG. 13, the space-charge controlling non-discharge pulse 26 may be added to the scanning electrode signal 12 and the common electrode signal 13, alternately, instead of the address electrode signal, according to a third embodiment
20 of the present invention. Here, the space-charge controlling non-discharge pulse 26 is added to the electrode signal to which the discharge sustaining pulses 18a and 18b are not applied, during a pause period of a discharge sustaining pulse. In the third embodiment, the loss of the address electrode 5 caused by ion collision encountered in the first embodiment of FIG. 1 can be prevented. FIG. 14
25 illustrates the waveforms of perfect driving signals of the AC plasma display panel to which the third embodiment of FIG. 13 is applied.

As shown in FIG. 15, to increase the utilization efficiency of the space charge, the space-charge controlling non-discharge pulse 26 may be applied to the address electrode 5, and the discharge electrodes 2 and 3 according to a fourth
30 embodiment. As shown in FIG. 16, a positive non-discharge pulse 26 for controlling this method can be applied to the discharge electrodes 2 and 3 with negative discharge sustaining pulses 18a and 18b according to a fifth embodiment

by modifying the fourth embodiment. The fifth embodiment also shows the advantage of preventing the loss of the address electrode 5 caused by ion collision. FIG. 17 illustrates the perfect waveforms of driving signals when the fifth embodiment of FIG. 16 is applied to a real AC plasma display panel.

5 As shown in FIGS. 18 and 19, the space charge controlling pulse 26 having the same polarity as those of the discharge sustaining pulses 18a and 18b to the main electrodes 2 and 3 for sustaining a discharge, after the discharge pulses 18a and 18b according to sixth and seventh embodiments. These methods can relieve circuitry burdens resulting from application of negative and positive voltages to a
10 single electrode. FIG. 20 illustrates the perfect waveforms of real driving signals when the method of the sixth embodiment is applied to the AC plasma display panel. FIGS. 21 and 22 illustrate the space-charge controlling non-discharge pulse 26 integrally added immediately after the discharge pulses 18a and 18b according to eighth and ninth embodiments. FIG. 23 illustrates the waveforms of perfect
15 driving signals when a discharge period signal is applied to the real AC plasma display panel. According to a tenth embodiment of the present invention, driving signals can be constituted as shown in FIG. 24. In this method, the address electrode signal 11 is at 0V, and a discharge is sustained by applying a positive discharge pulse and a negative discharge pulse to a discharge electrode, i.e., a
20 scanning electrode. Further, the space charge control effects of the present invention can be achieved by applying the space-charge controlling non-discharge pulse 26 having the same polarity as that of the discharge pulse during a pause period of the discharge pulse. FIG. 25 illustrates the waveforms of driving signals for a plasma display panel in which a discharge pulse 18 is integrated with the
25 space-charge controlling non-discharge pulse 26 to facilitate generation of pulses applied to the tenth embodiment in terms of circuitry, according to an eleventh embodiment.

FIG. 26 illustrates the waveforms of driving signals of a plasma display panel in which the positive and negative discharge pulses 18a and 18b are
30 alternately applied to an electrode, for example, the scanning electrode 2, and non-discharge pulses 26a and 26b having opposite polarities for controlling space charge are applied to another electrode, i.e., an address electrode, immediately after the

discharge pulses 18a and 18b, according to a twelfth embodiment.

FIG. 27 illustrates the waveforms of driving signals in which a predetermined negative voltage ΔV is applied during the discharge period of the address electrode signal 11 and the space-charge controlling non-discharge pulse 26 is added thereto, according to a thirteenth embodiment. This driving method relatively lowers the non-discharge pulse 26 for controlling space charge, thus preventing leakage of a discharge current from the address electrode 5.

FIG. 28 illustrates the waveforms of driving signals when the space-charge controlling non-discharge pulse 26 is added to a DC plasma display panel having the address electrode 5 and the scanning electrode 2 according to a fourteenth embodiment. This method can also control space charge by adding the non-discharge pulse 26 for controlling space discharge, which has a polarity opposite to a discharge pulse during the discharge period 16 of the scanning electrode signal 12. FIG. 29 illustrates the space-charge controlling non-discharge pulse 26 integrated with the discharge sustaining pulse 18 to facilitate generation of pulses of driving signals of the fourteenth embodiment in terms of circuitry according to a fifteenth embodiment.

Industrial Applicability

As described above, the method for driving a discharge device, especially a plasma display panel, prevents the increase of the discharge voltage and a decrease of the operating margin since space charge is efficiently controlled to lower the discharge sustaining voltage by adding a non-discharge signal for controlling space charge to a driving signal applied to at least one of two discharge electrodes, or to a third electrode, during a discharge sustaining period of the driving signals applied to both the discharge electrodes. Accordingly, the method for driving a plasma display panel of the present invention provides an effect of improving the increase of the discharge sustaining voltage and the decrease of the operating margin, which could not be achieved by U.S. Patent No. 4,833,463 of AT&T. In particular, the effects of the present invention is remarkably excellent in the case of a pulse width of $1\mu\text{s}$ or below. Discharge can be stably sustained by using a space-charge controlling non-discharge pulse of $200\text{ns} \sim 1\mu\text{s}$ wide,

according to the panel structure, physical characteristics, and the driving method. In addition, in a method for applying the space-charge controlling non-discharge pulse according to the present invention, discharge efficiency can be increased by enabling the space-charge controlling non-discharge pulse to efficiently use space

5 charge in a discharge space during a discharge sustaining period.

What is claimed is:

1. A method for driving a discharge device which has at least a pair of electrodes and generates a discharge by applying a discharge address pulse and a discharge sustaining pulse to at least one of said pair of electrodes, said driving
5 method comprises the step of applying a space charge controlling pulse to at least one of said electrodes during a sustaining period.
2. The method of claim 1, wherein the space charge controlling pulse is applied during a pause period of said discharge sustaining pulse.
3. The method of claim 2, wherein the voltage level of said space charge
10 controlling pulse is in a range in which a self-sustained discharge caused by the voltage itself is avoided.
4. The method of claim 2, wherein the pulse width of said space charge controlling pulse is between 200nsec-1 μ sec.
5. The method of claim 2, wherein said discharge device comprises:
15 a pair of electrodes in parallel for generating a sustainment discharge by alternately applying discharge sustaining pulses of the same polarity; and
a third electrode orthogonal to said pair of electrodes, for generating an address discharge in cooperation with at least one of said pair of electrodes upon application of a discharge address pulse.
- 20 6. The method of claim 5, wherein said space charge controlling pulse is applied to said third electrode during the pause period of said discharge sustaining pulse.
7. The method of claim 6, wherein said space charge controlling pulse is negative.
- 25 8. The method of claim 5, wherein said space charge controlling pulse is applied to at least one of said pair of parallel electrodes during the pause period of said discharge sustaining pulse.
9. The method of claim 8, wherein said space charge controlling pulse is applied to electrodes to which said discharge sustaining pulse is applied
30 immediately after said discharge sustaining pulse, and has the same polarity as that of said discharge sustaining pulse.
10. The method of claim 9, wherein said discharge sustaining pulse and

said space charge controlling pulse are integrated in terms of their periods.

11. The method of claim 8, wherein said space charge controlling pulse has a polarity opposite to that of said discharge sustaining pulse, and is applied to an electrode to which said discharge sustaining pulse is not applied, immediately after
5 said discharge sustaining pulse.

12. The method of claim 5, wherein said space charge controlling pulse is applied to said pair of parallel electrodes and said third electrode.

13. The method of claim 12, wherein said space charge controlling pulse applied to said third electrode has a negative polarity.

10 14. The method of claim 12, wherein said space charge controlling pulse applied to said pair of parallel electrodes has the same polarity as that of said discharge sustaining pulse, and is applied to said electrode to which said discharge sustaining pulse is applied, immediately after said discharge sustaining pulse.

15 15. The method of claim 14, wherein said discharge sustaining pulse and said space charge controlling pulse are integrated in terms of their periods.

16. The method of claim 12, wherein said space charge controlling pulse applied to said pair of parallel electrodes has a polarity opposite to that of said discharge sustaining pulse, and is applied to an electrode to which said discharge sustaining pulse is not applied, immediately after said discharge sustaining pulse.

20 17. The method of claim 5, wherein said pair of parallel electrodes are covered with an insulation layer and the polarity of said discharge sustaining pulse varies with time.

18. The method of claim 5, comprising the steps of:

25 addressing a discharge by applying said discharge address pulse to said third electrode and thus selecting an intended pixel; and

sustaining the discharge by applying said discharge sustaining pulse to at least one of said pair of parallel electrodes and thus maintaining luminescence of said selected pixel,

30 wherein said discharge addressing step is temporally independent of said discharge sustaining step, and said discharge sustaining period includes repeated discharge sustaining pulses and discharge pause periods.

19. The method of claim 2, wherein said discharge device has a pair of

parallel electrodes for generating a sustainment discharge by alternately applying discharge sustaining pulses of the same polarity.

20. The method of claim 19, wherein said space charge controlling pulse having a polarity opposite to that of said discharge sustaining pulses is applied to the other electrode immediately after said discharge pulse applied to at least one of said pair of electrodes is terminated.

21. The method of claim 19, wherein said space charge controlling pulse having the same polarity as that of said discharge sustaining pulse voltage is applied to the other electrode immediately after said discharge sustaining pulse applied to one of said pair of electrodes is terminated.

22. The method of claim 21, wherein said discharge sustaining pulse is integrated with said space charge controlling pulse in terms of their periods.

23. The method of claim 2, wherein said discharge device has a pair of electrodes, to one of which a positive discharge sustaining pulse is applied and to the other of which a negative discharge sustaining pulse is applied.

24. The method of claim 23, wherein a positive space charge controlling pulse is applied to an electrode to which said negative discharge sustaining pulse is applied, immediately after said discharge sustaining pulse.

25. The method of claim 24, wherein said discharge sustaining pulse is integrated with said space charge controlling pulse in terms of their periods.

26. The method of claim 23, comprising the steps of:

addressing a discharge by applying said discharge address pulse to said third electrode and thus selecting an intended pixel; and

sustaining the discharge by applying said discharge sustaining pulse to at least one of said pair of parallel electrodes and thus displaying said selected pixel luminescently,

wherein said discharge addressing step is temporally independent of said discharge sustaining step, and said discharge sustaining period includes repeated discharge sustaining pulses and discharge pause periods.

27. The method of claim 2, wherein a discharge sustaining pulse is applied only to one electrode of said pair of electrodes.

28. The method of claim 27, wherein said discharge sustaining pulse has

positive and negative polarities, alternately, and said space charge controlling pulse having a polarity opposite to that of said discharge sustaining pulse is applied to the other electrode immediately after said discharge sustaining pulse is applied.

29. The method of claim 27, wherein one of said pair of electrodes is at
5 0V, said discharge sustaining pulse having positive and negative polarities is applied to said other electrode, and said space charge controlling pulse having the same polarity as that of said discharge sustaining pulse is applied after said discharge sustaining pulse.

30. The method of claim 27, wherein said discharge sustaining pulse is
10 integrated with said space charge controlling pulse in terms of their periods.

1/17

FIG. 1A


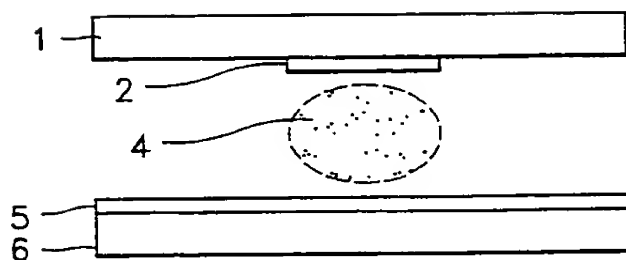


FIG. 1B

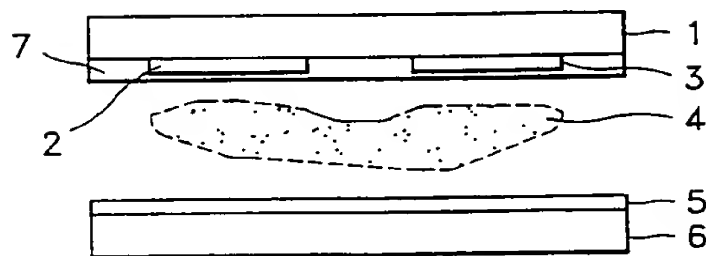

2/17

FIG. 2A


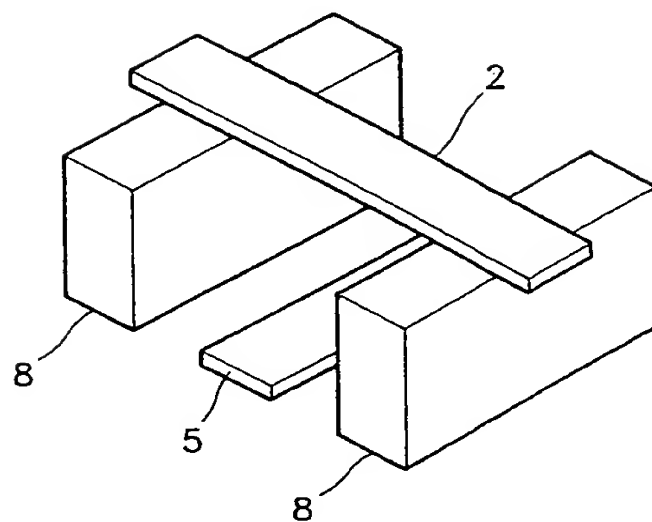


FIG. 2B

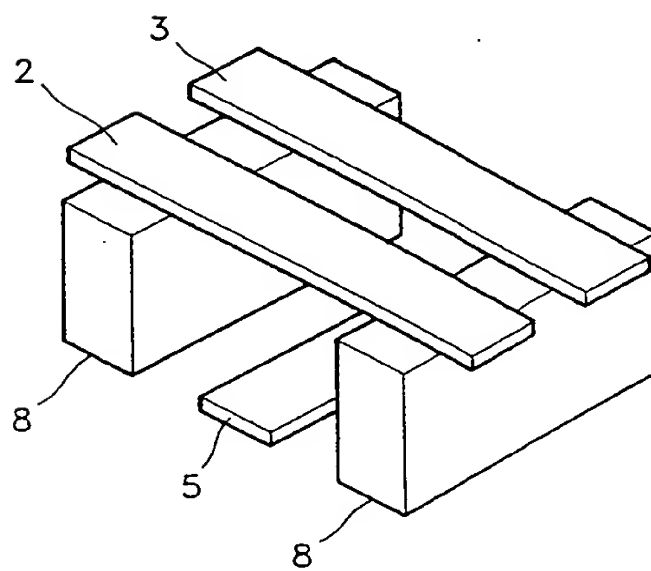

3/17

FIG. 3


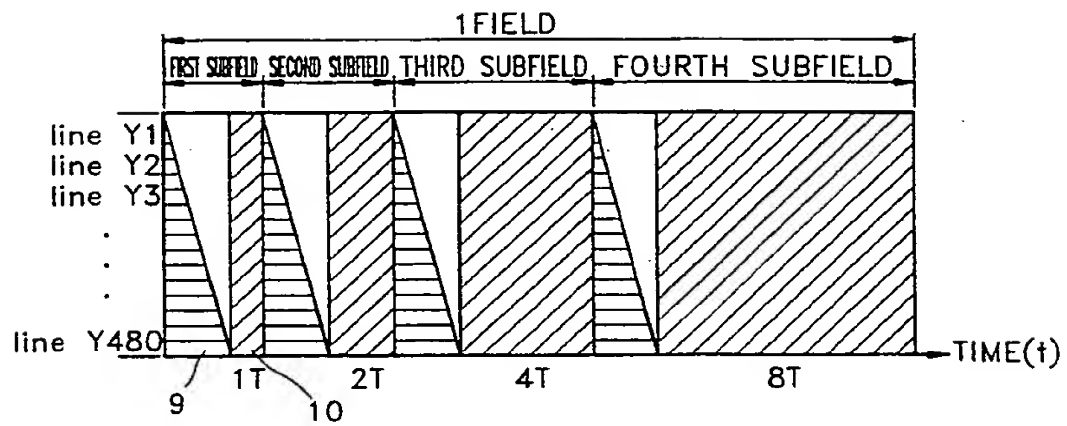


FIG. 4

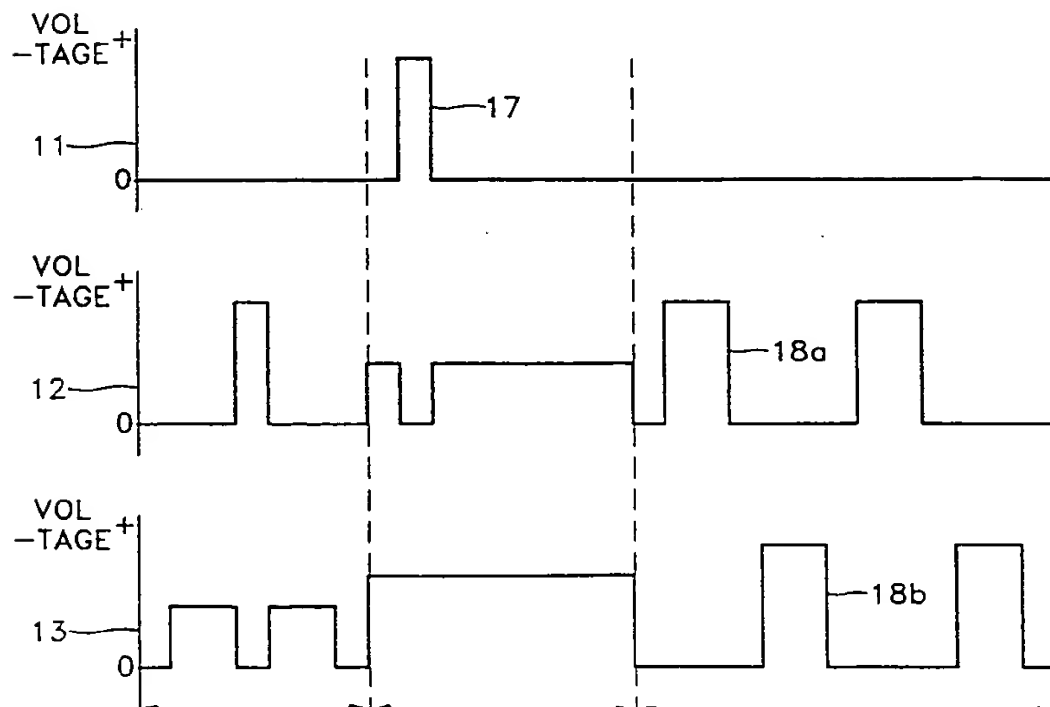

4/17

FIG. 5


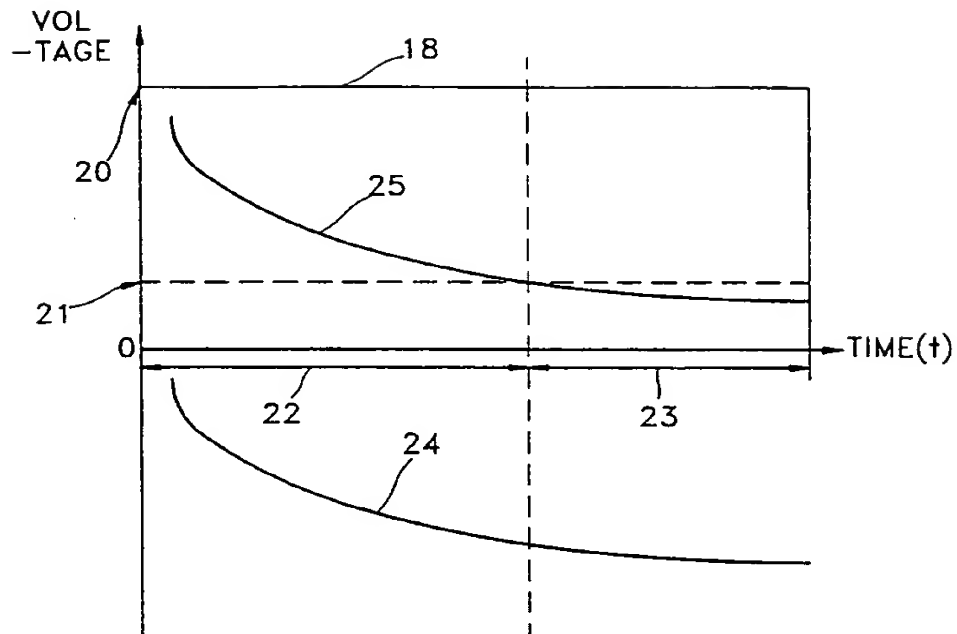


FIG. 6

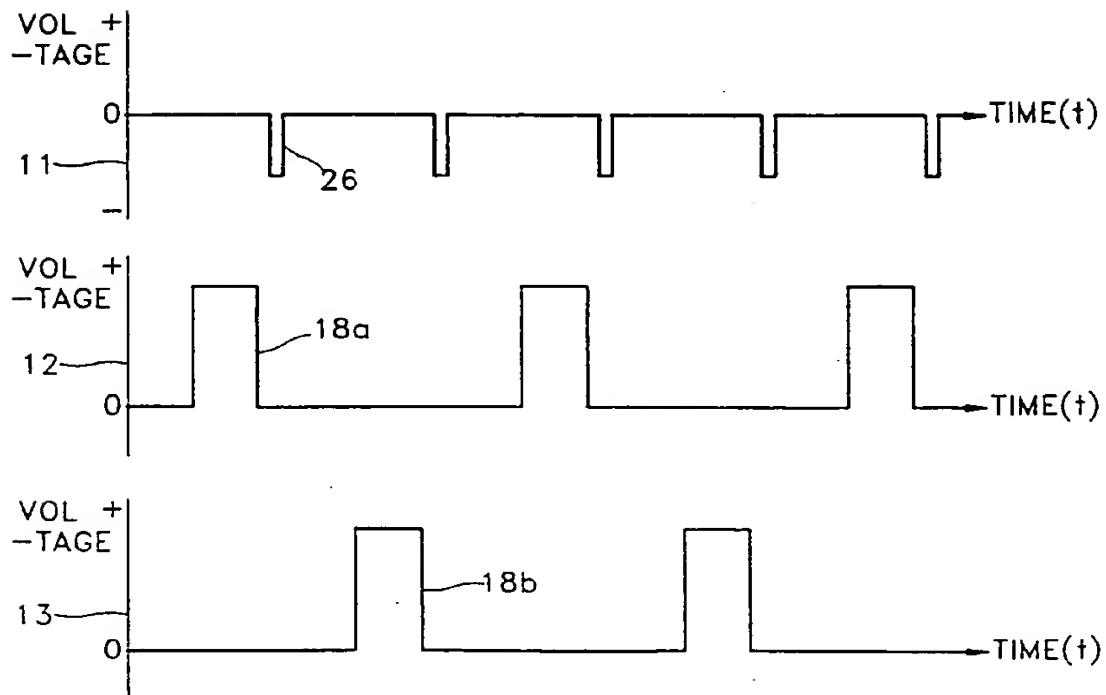

5/17

FIG. 7


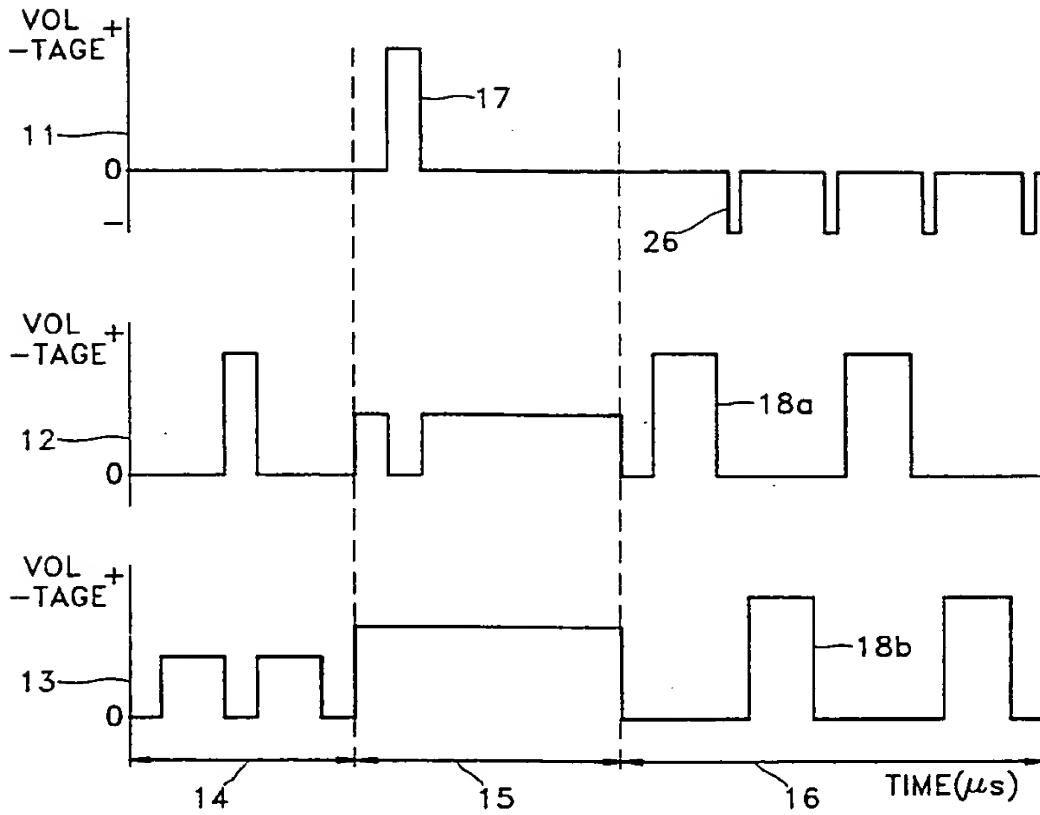



FIG. 8A

FIG. 8B

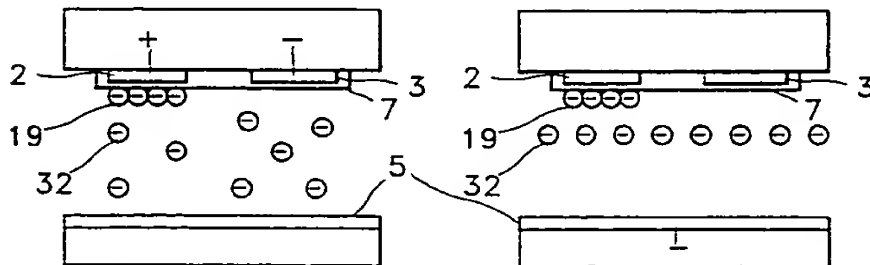


6/17

FIG. 9

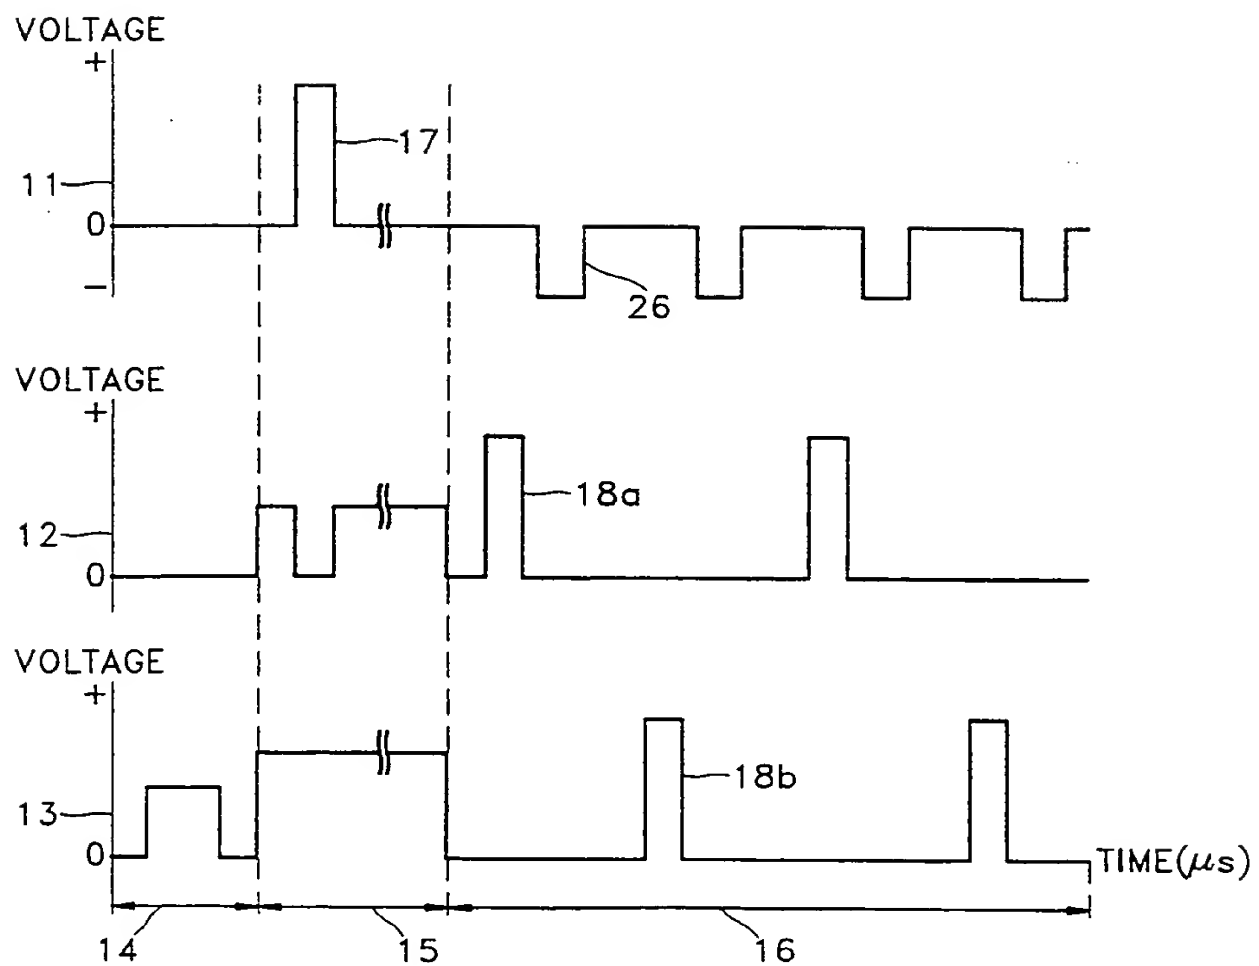

7/17


FIG. 10

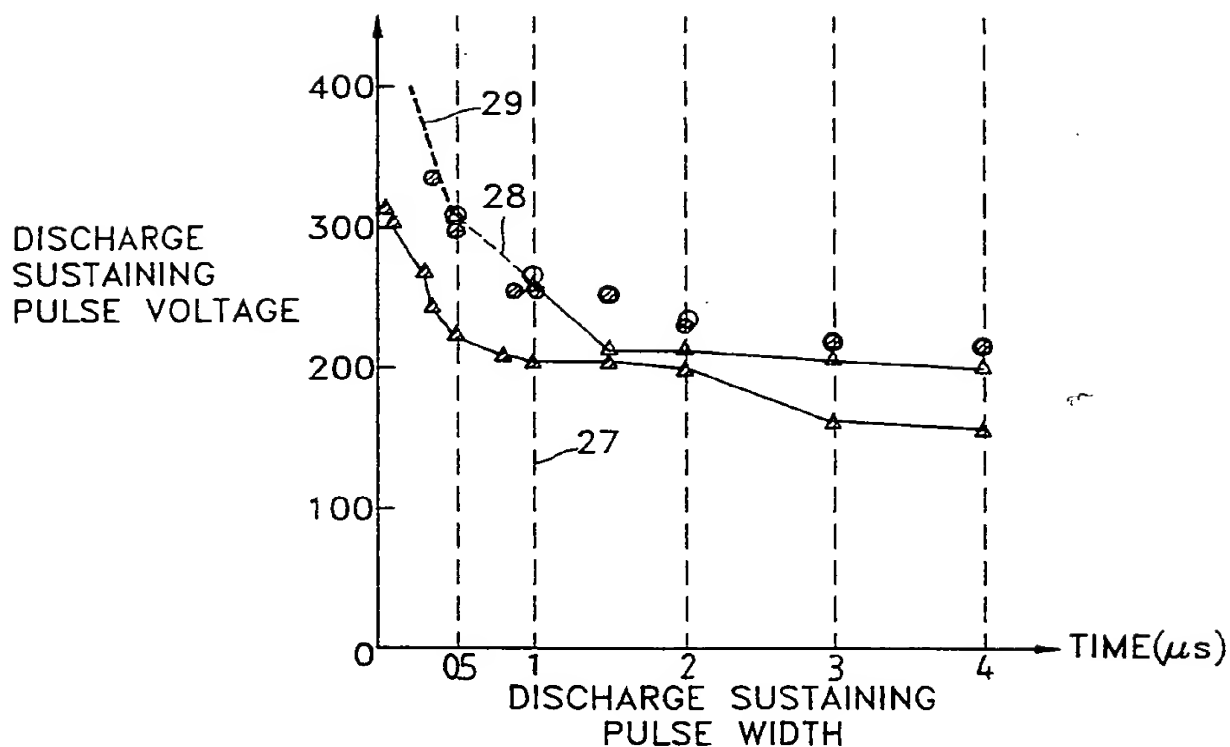

- OVERALL DISCHARGE (WITHOUT APPLICATION SPACE-CHARGE CONTROLLING NON-DISCHARGE PULSE)
- △ ADDRESS DISCHARGE (WITHOUT APPLICATION SPACE-CHARGE CONTROLLING NON-DISCHARGE PULSE)
- ⊙ OVERALL DISCHARGE (WITH APPLICATION SPACE-CHARGE CONTROLLING NON-DISCHARGE PULSE)
- △ ADDRESS DISCHARGE (WITH APPLICATION SPACE-CHARGE CONTROLLING NON-DISCHARGE PULSE)
- DISCHARGE SUSTAINING PULSE CYCLE: 10 μs
- WIDTH OF SPACE-CHARGE CONTROLLING NON-DISCHARGE PULSE: 700 ns

8/17


FIG. 11

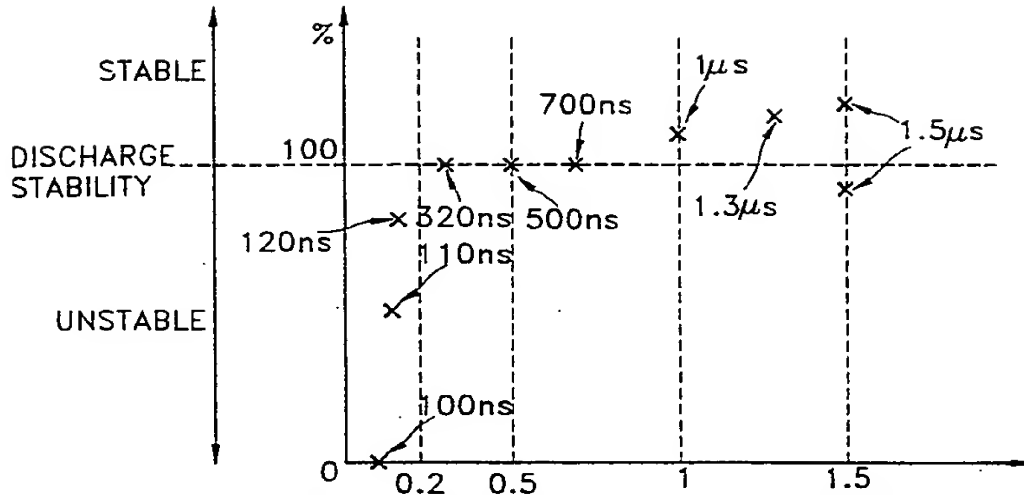

WIDTH OF SPACE-CHARGE CONTROLLING
NON-DISCHARGE PULSE

- DISCHARGE SUSTAINING PULSE CYCLE: $10\mu s$,
PULSE: 100ns
- VOLTAGE OF SPACE-CHARGE
NON-DISCHARGE PULSE: 150V

FIG. 12

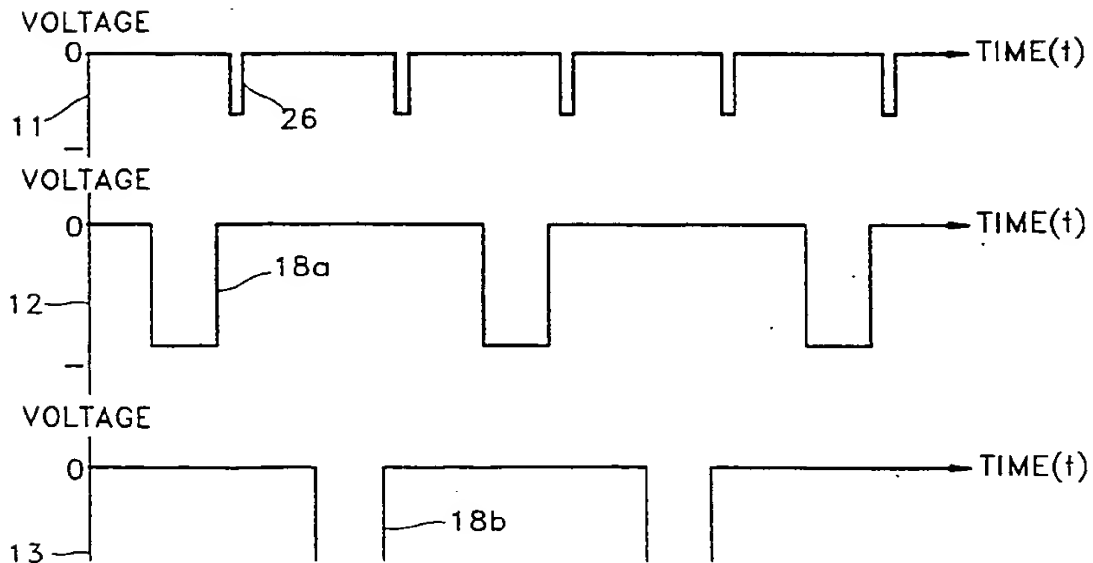

9/17

FIG. 13


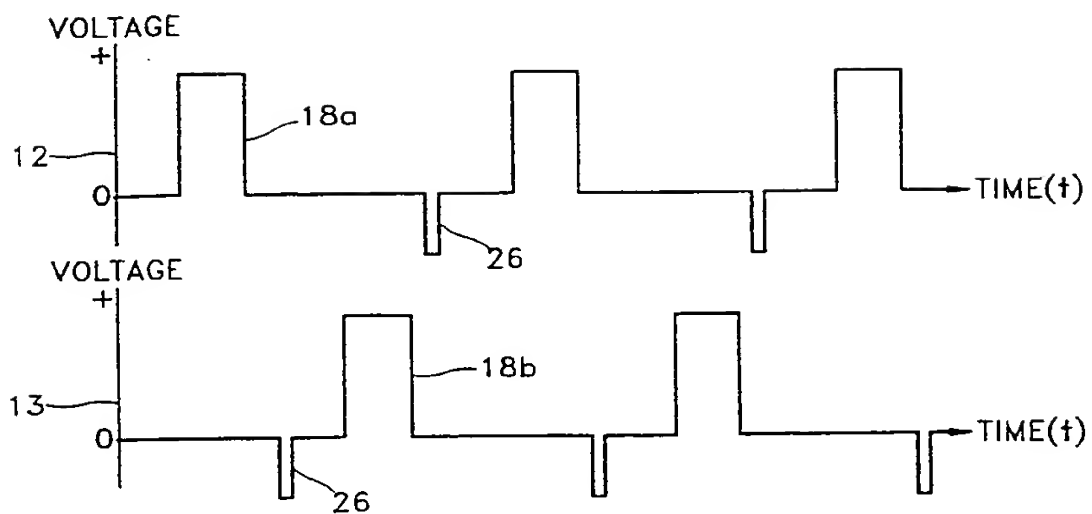


FIG. 14

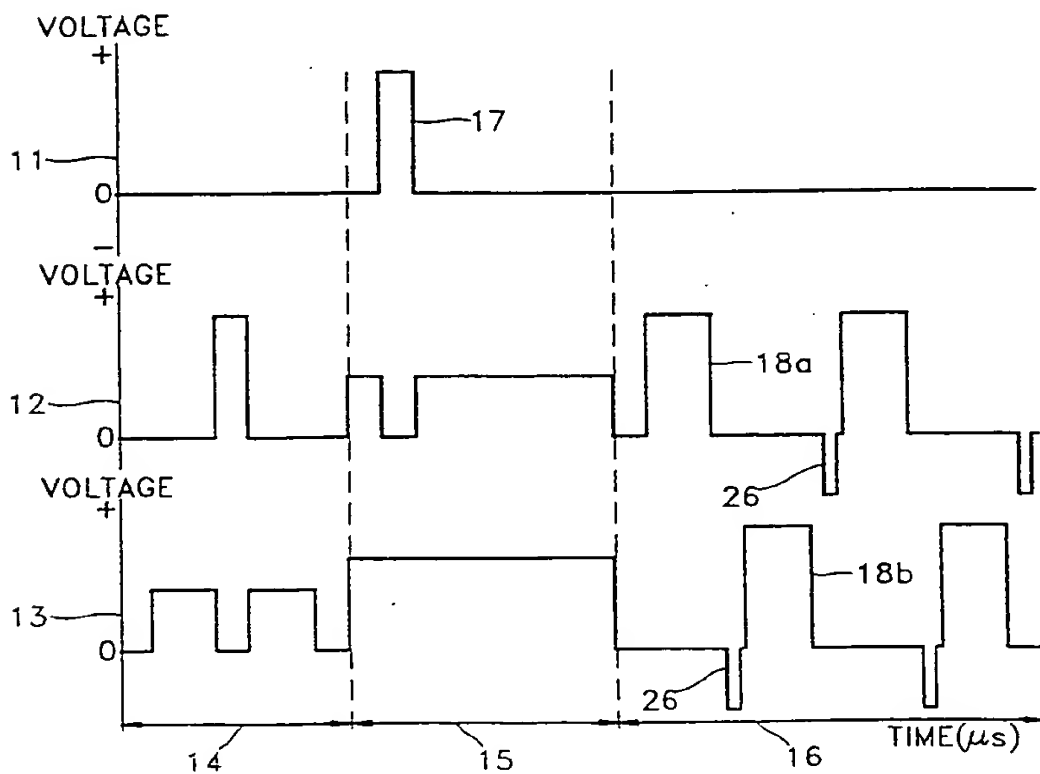

10/17

FIG. 15


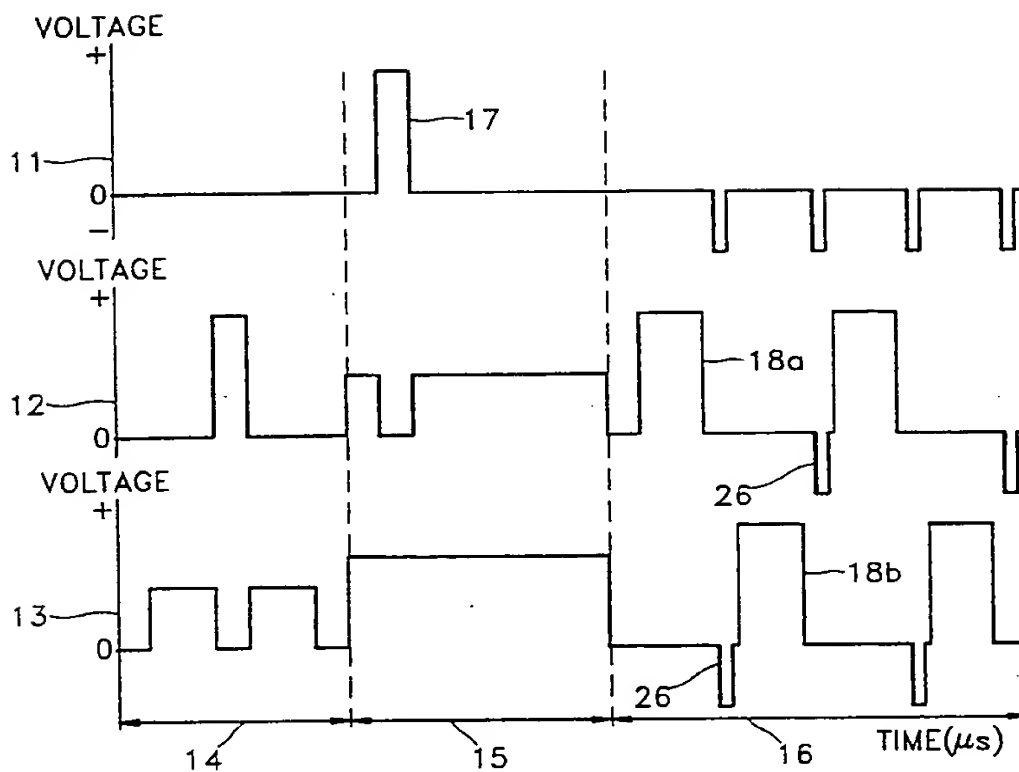


FIG. 16

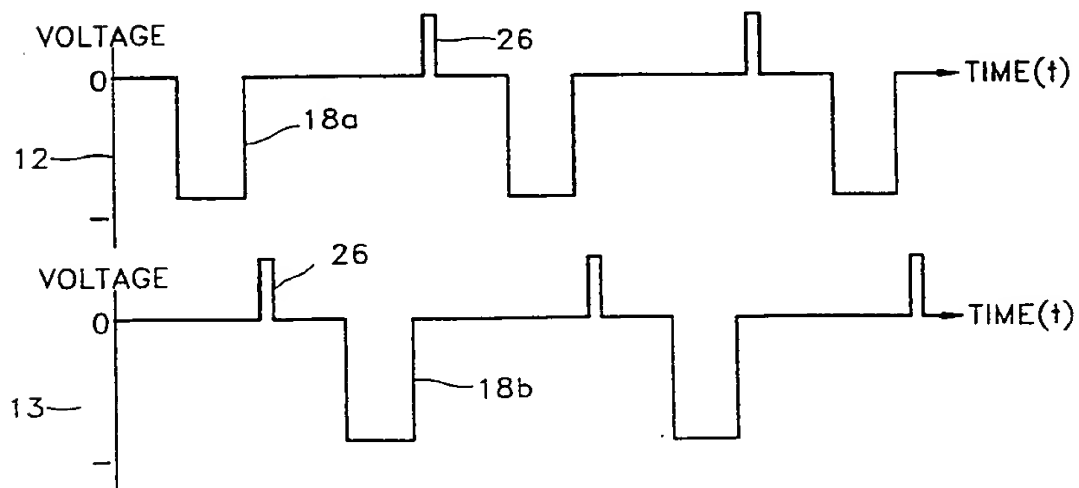

11/17

FIG. 17


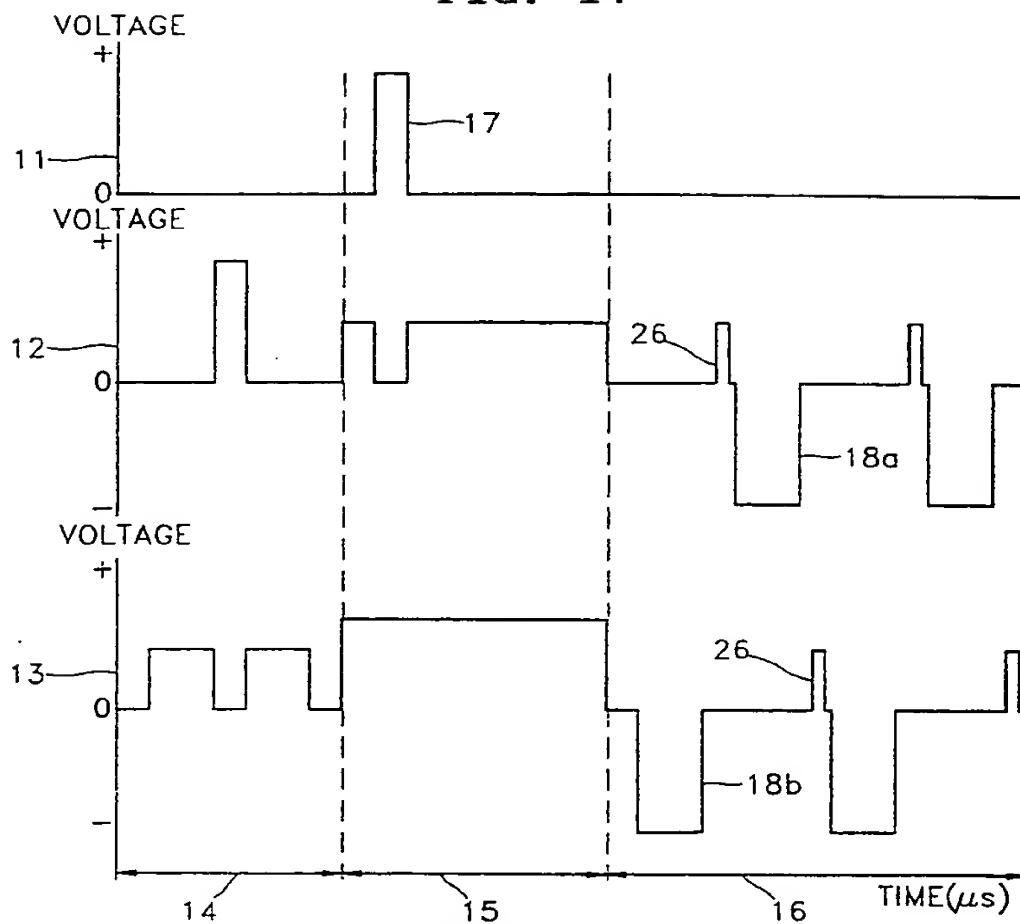


FIG. 18

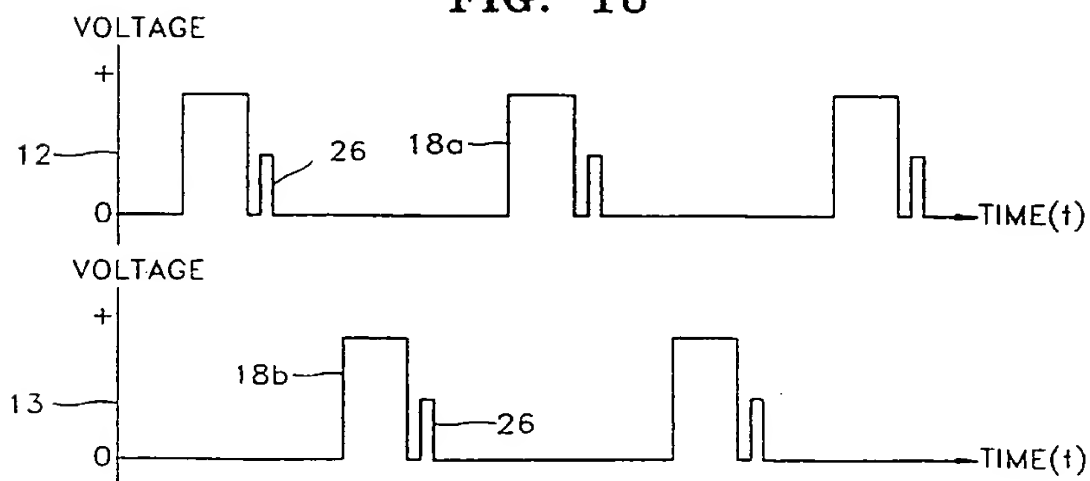

12/17

FIG. 19


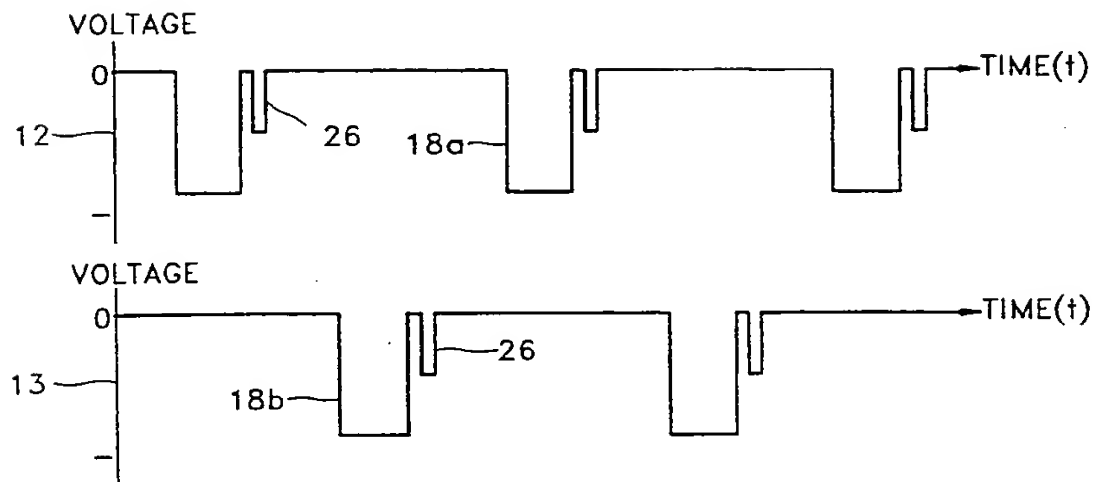


FIG. 20

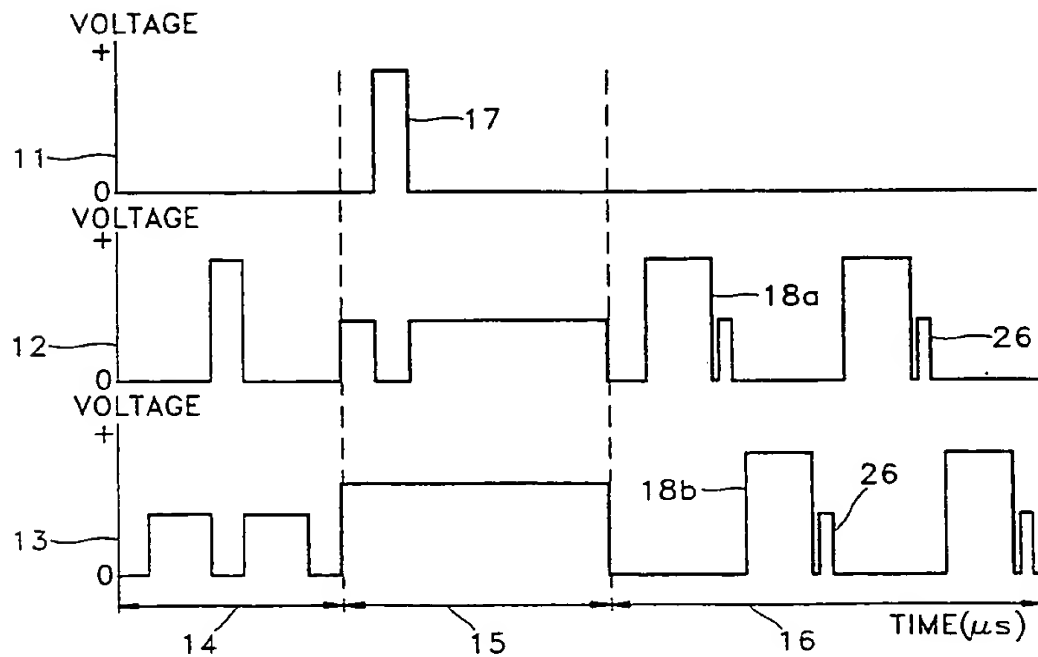

13/17

FIG. 21


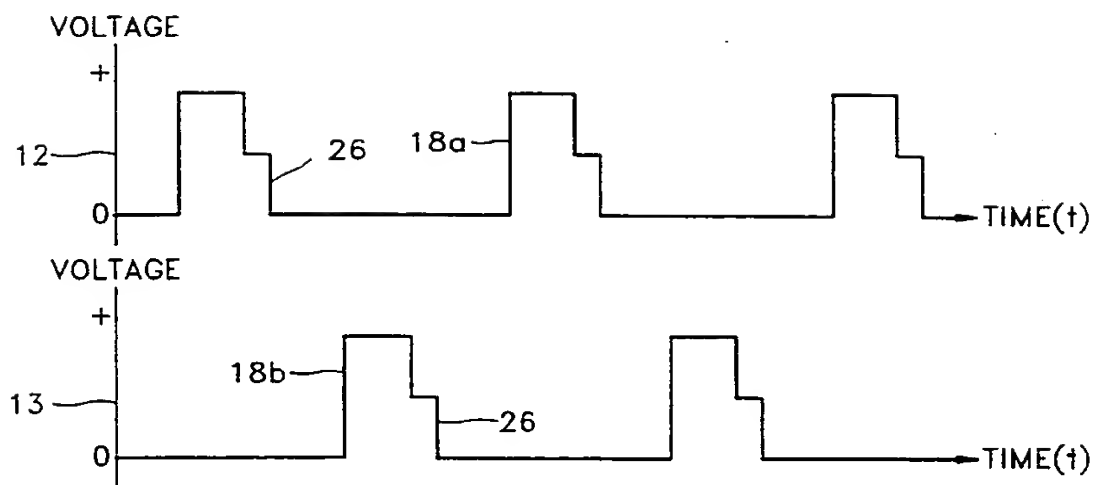


FIG. 22

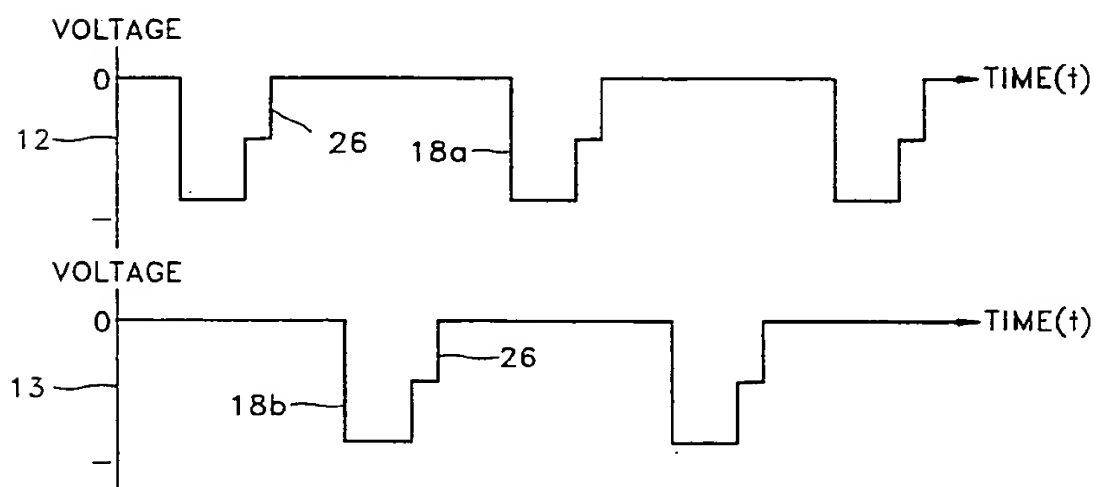

14/17

FIG. 23


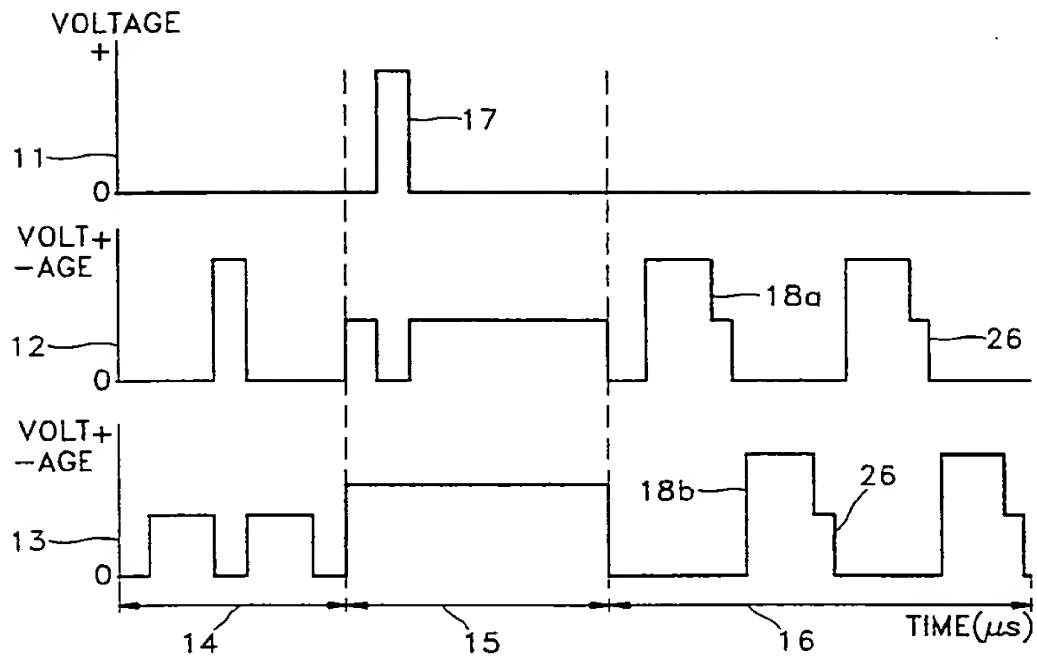


FIG. 24

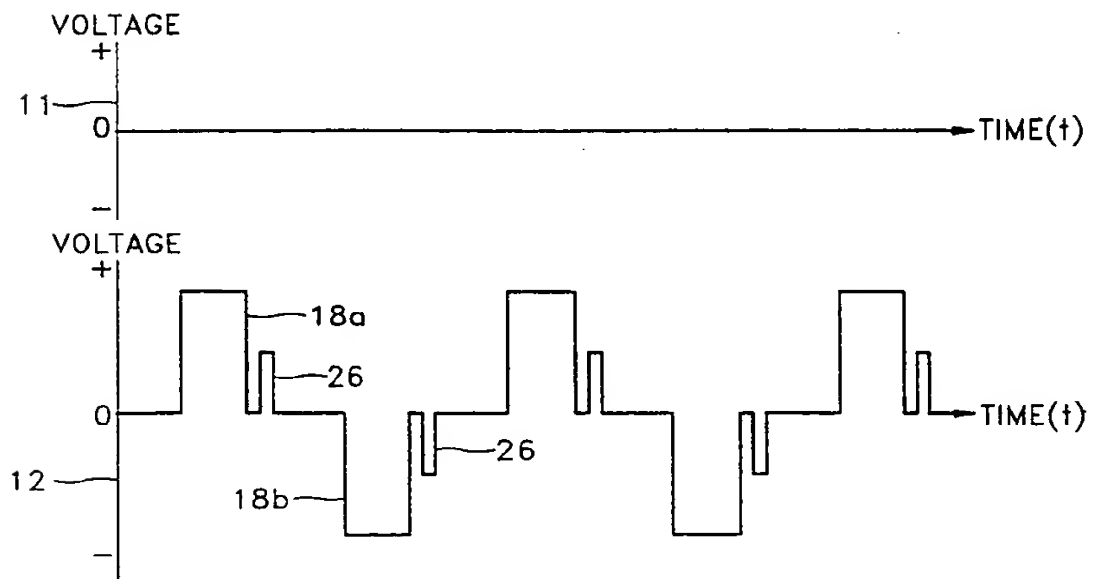

15/17

FIG. 25



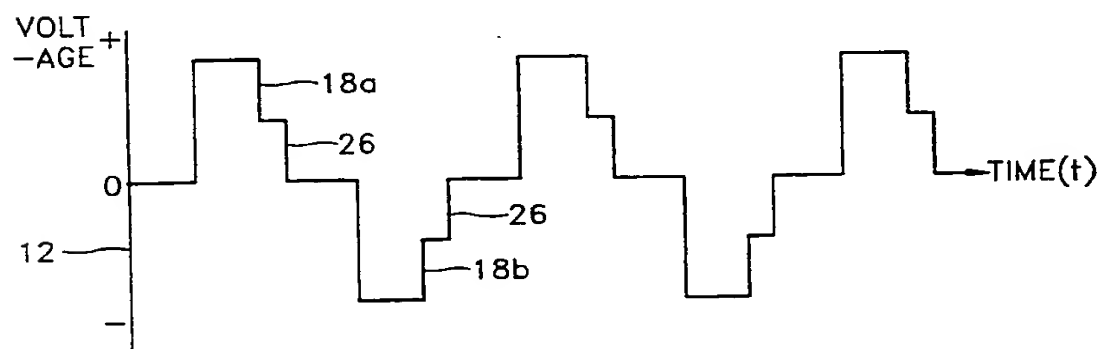


FIG. 26

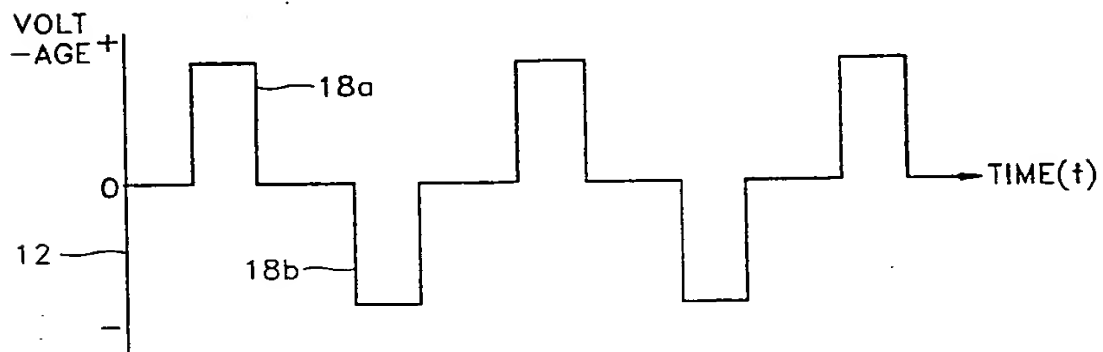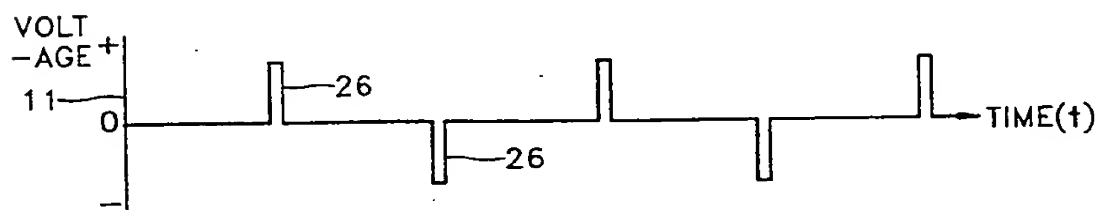

16/17

FIG. 27



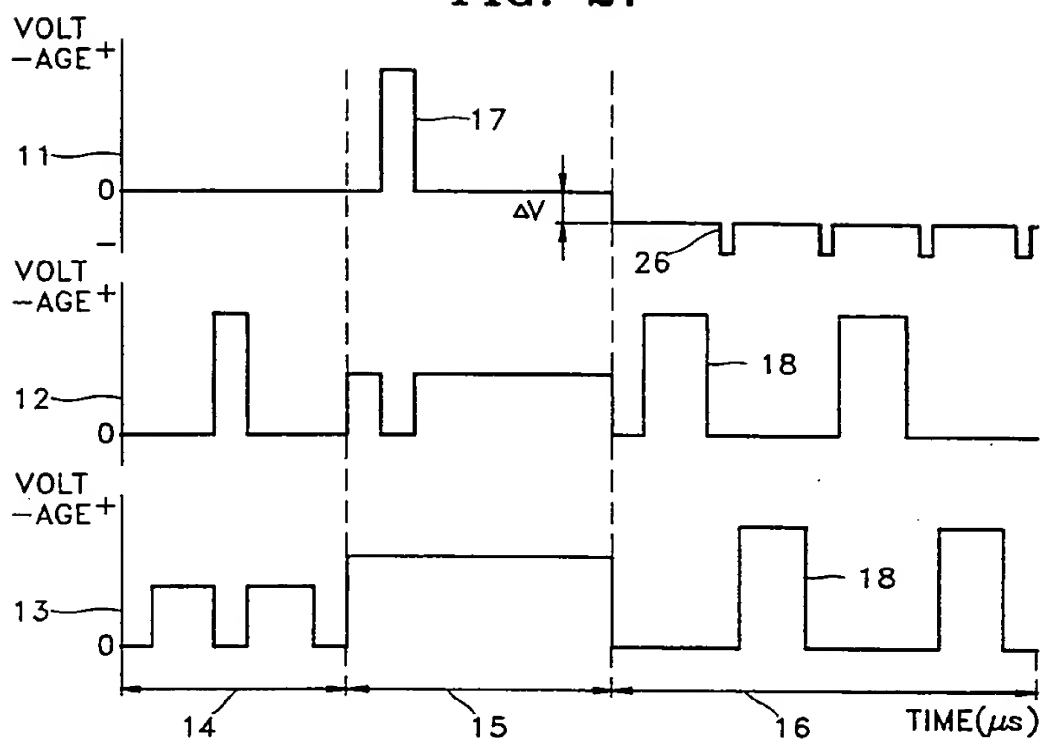


FIG. 28

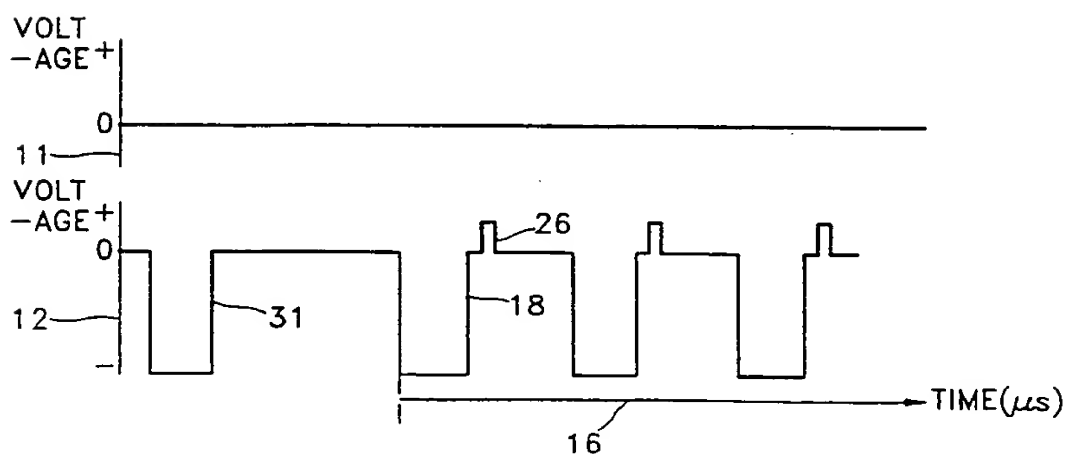

17/17

FIG. 29

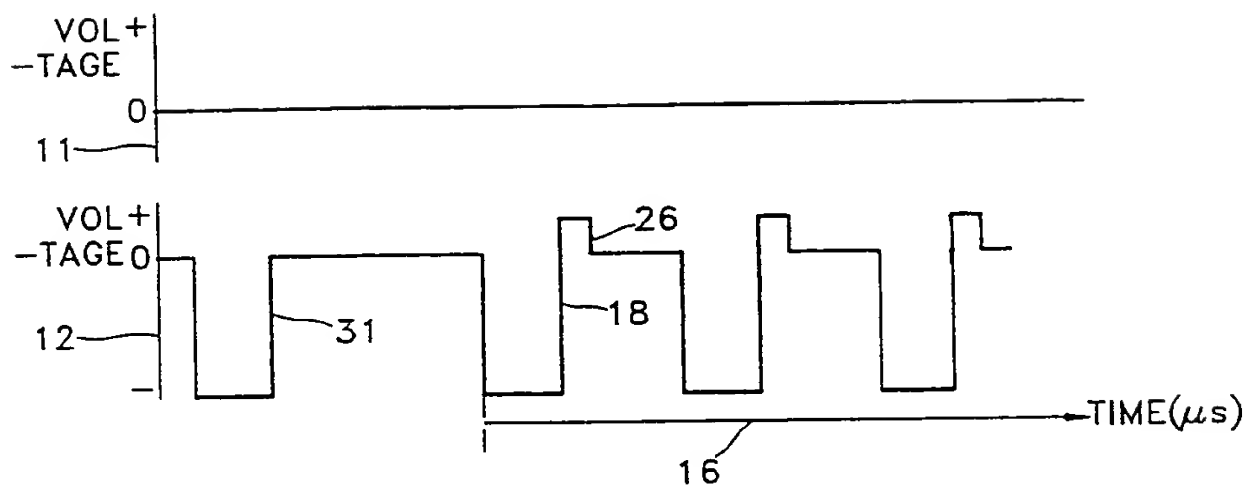

INTERNATIONAL SEARCH REPORT

International application No.

PCT/KR 97/00112

A. CLASSIFICATION OF SUBJECT MATTER

IPC⁶: G 09 G 3/28

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC⁶: G 09 G 3/28; H 01 J 17/49

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPIL

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 43 01 437 A1 (SAMSUNG ELECTRON DEVICES CO., LTD.) 16 September 1993 (16.09.93), fig.3 and corresponding text.	1
A	US 4 833 463 A (DICK et al.) 23 May 1989 (23.05.89), fig.6 and corresponding text (document mentioned in the application).	1

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

08 September 1997 (08.09.97)

Date of mailing of the international search report

18 September 1997 (18.09.97)

Name and mailing address of the ISA/ AT

AUSTRIAN PATENT OFFICE
Kohlmarkt 8-10
A-1014 Vienna
Facsimile No. 1/53424/535

Authorized officer:

Kutzelnigg

Telephone No. 1/53424/456

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.

PCT/KR 97/00112

Im Recherchenbericht angeführtes Patentdokument Patent document cited in search report Document de brevet cité dans le rapport de recherche	Datum der Veröffentlichung Publication date Date de publication	Mitglied(er) der Patentfamilie Patent family member(s) Membre(s) de la famille de brevets	Datum der Veröffentlichung Publication date Date de publication
DE A1 4301437		keine - none - rien	
US A 4833463	23-05-89	keine - none - rien	